


Tile Loading on Polystick TU, Polystick TU Plus, Polystick TU Polyester, Polystick MTS and Polyflex SA P, SA P FR

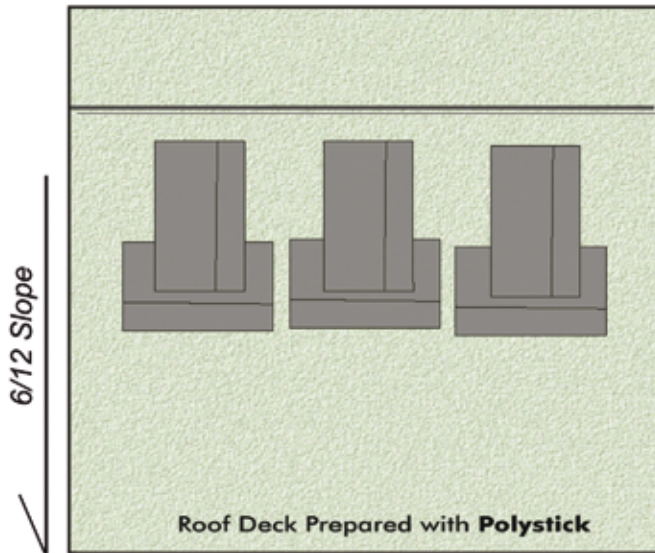


POLYGLASS® recommended Tile Placement, when stacking roofing tiles on slopes up to 6/12 deck, prepared with **Polystick** underlayments or **SA Self-Adhesive Membranes**.

Batten strips are required on slope of 7/12 or greater.

POLYGLASS® does not recommend stacking more than 6 tiles per stack. Tiles shall be stacked as per diagram.

Two (2) tiles perpendicular to slope and four (4) tiles placed atop, parallel to slope.

Note: These are POLYGLASS® recommendations, POLYGLASS® will not be responsible for lost tiles in the event of accidental slippage.

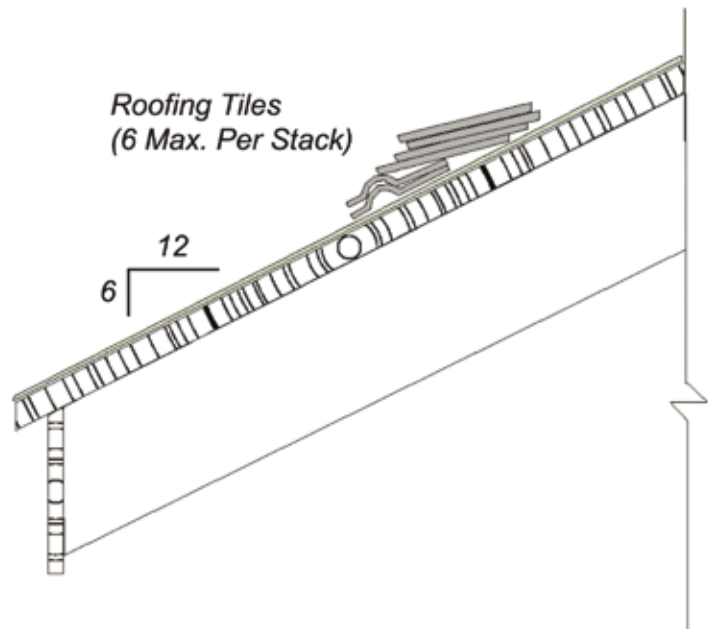

Note: These are POLYGLASS® recommendations, POLYGLASS® will not be responsible for lost tiles in the event of accidental slippage.